







PROJECT	TYPE NO.	DATE

DOWNLIGHT

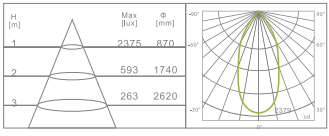
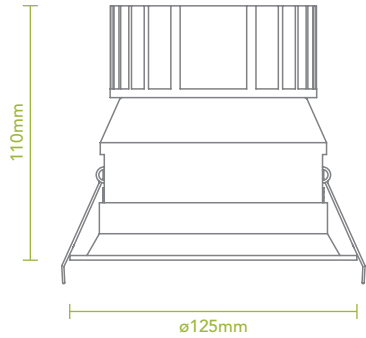
ORBIT-302

-  IP20
-  F
CE
- 
-  $\varnothing 115\text{mm}$
-  BLACK
-  WHITE

- TRIM**
Aluminium Die-Cast
Electrostatically applied Powder Coat
- FRAME**
Steel
- HEAT SINK**
Aluminium Anodised Coating
- REFLECTOR**
Aluminium Anodised Specular Silver
- LED MODULE**
Cree, Optional: Philips, Osram, Tridonic
- DRIVER**
Remote Philips, Osram, Tridonic
- DIMMING OPTIONS**
DALI, Touch Dim, DSI or 1V-10V
- INPUT VOLTAGE**
220V-240V AC/50Hz-60Hz
- OPERATING TEMPERATURE RANGE**
-20°C to +40°C
- MAINTENANCE OF LUMEN**
L70 50,000 hours at 25°C
- DRIVER LIFETIME**
50,000 hours
- SYSTEM WARRANTY**
5 years



MODEL	LED	LUM. LUMENS*	SYS. POWER*	CRI	CCT	BEAM ANGLE	DIMENSIONS
ORB-302	CREE	1900lm	20W	≥80	3000K	20°, 30°, 55°	ø125 x 110mm
		1950lm			4000K		
ORB-302	CREE	2500lm	28W	≥80	3000K	20°, 30°, 55°	ø125 x 110mm
		2600lm			4000K		

PHOTOMETRIC DATA	SECTION SIZE												
<p>CREE COB 2000lm - 45°</p> <table border="1" style="font-size: small;"> <thead> <tr> <th>H [m]</th> <th>Max [lx]</th> <th>Ø [mm]</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>2375</td> <td>870</td> </tr> <tr> <td>2</td> <td>593</td> <td>1740</td> </tr> <tr> <td>3</td> <td>263</td> <td>2620</td> </tr> </tbody> </table> 	H [m]	Max [lx]	Ø [mm]	1	2375	870	2	593	1740	3	263	2620	 <p>110mm</p> <p>ø125mm</p>
H [m]	Max [lx]	Ø [mm]											
1	2375	870											
2	593	1740											
3	263	2620											