

PROJECT	TYPE NO.	DATE

SURFACE-MOUNTED DOWNLIGHT

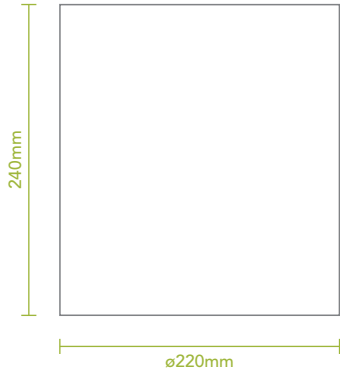
TAURUS-220

-  IP20
- 
- 
- 

- HOUSING**
Aluminium Electrostatically applied Powder Coat
- MOUNTING RING**
Aluminium Die-Cast
Electrostatically applied Powder Coat
- HEAT SINK**
Aluminium Anodised Coating
- REFLECTOR**
Aluminium Anodised Specular Silver
- LED MODULE**
Cree
Optional: Philips, Osram, Tridonic
- DRIVER**
Integrated: Philips, Osram, Tridonic
- DIMMING OPTIONS**
Remote: DALI, Touch Dim, DSI or 1V-10V
- INPUT VOLTAGE**
220V-240V AC/50Hz-60Hz
- OPERATING TEMPERATURE RANGE**
-20°C to +40°C
- MAINTENANCE OF LUMEN**
L70 50,000 hours at 25°C
- DRIVER LIFETIME**
50,000 hours
- SYSTEM WARRANTY**
5 years



MODEL	LED	LUM. LUMENS*	SYS. POWER*	CRI	CCT	BEAM ANGLE	DIMENSIONS
TRS-220	CREE	2180lm	35W	≥80	3000K	15°, 30°, 45°, 60°	ø220 x 240mm
		2270lm			4000K		
TRS-220	CREE	2900lm	43W	≥80	3000K	15°, 30°, 45°, 60°	ø220 x 240mm
		3000lm			4000K		

PHOTOMETRIC DATA				SECTION SIZE																									
CREE COB 28W - 15° <table border="1"> <thead> <tr> <th>H [m]</th> <th>Max flux [lm]</th> <th>Φ [mm]</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>12237</td> <td>304</td> </tr> <tr> <td>2</td> <td>3059</td> <td>608</td> </tr> <tr> <td>3</td> <td>1360</td> <td>912</td> </tr> </tbody> </table>		H [m]	Max flux [lm]	Φ [mm]	1	12237	304	2	3059	608	3	1360	912	CREE COB 28W - 30° <table border="1"> <thead> <tr> <th>H [m]</th> <th>Max flux [lm]</th> <th>Φ [mm]</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>6767</td> <td>522</td> </tr> <tr> <td>2</td> <td>1439</td> <td>1044</td> </tr> <tr> <td>3</td> <td>640</td> <td>1565</td> </tr> </tbody> </table>		H [m]	Max flux [lm]	Φ [mm]	1	6767	522	2	1439	1044	3	640	1565		
H [m]	Max flux [lm]	Φ [mm]																											
1	12237	304																											
2	3059	608																											
3	1360	912																											
H [m]	Max flux [lm]	Φ [mm]																											
1	6767	522																											
2	1439	1044																											
3	640	1565																											
CREE COB 28W - 45° <table border="1"> <thead> <tr> <th>H [m]</th> <th>Max flux [lm]</th> <th>Φ [mm]</th> </tr> </thead> <tbody> <tr> <td>1</td> <td>3860</td> <td>821</td> </tr> <tr> <td>2</td> <td>914</td> <td>1642</td> </tr> <tr> <td>3</td> <td>406</td> <td>2483</td> </tr> </tbody> </table>		H [m]	Max flux [lm]	Φ [mm]	1	3860	821	2	914	1642	3	406	2483																
H [m]	Max flux [lm]	Φ [mm]																											
1	3860	821																											
2	914	1642																											
3	406	2483																											