






PROJECT	TYPE NO.	DATE

TROFFER



ARC-S3

 IP20
 F
 CE

 WHITE

- CONSTRUCTION**
Cold rolled Sheet Steel
Electrostatically applied Powder Coat
- DIFFUSER**
Linear Prismatic fully Frosted Acrylic Low-Glare Lens
- LED MODULE**
Osram
Optional: Philips, Tridonic
- DRIVER**
Osram
Optional: Philips, Tridonic
- DIMMING OPTIONS**
DALI, Touch Dim, DSI or 1V-10V
- INPUT VOLTAGE**
220V-240V AC/50Hz-60Hz
- OPERATING TEMPERATURE RANGE**
-20°C to +40°C
- MAINTENANCE OF LUMEN**
L70 50,000 hours at 25°C
- DRIVER LIFETIME**
50,000 hours
- SYSTEM WARRANTY**
5 years
- AVAILABLE WITH**
 - Bespoke Sizing
 - Surface-Mounting Kits
 - Plaster-Recess Kits

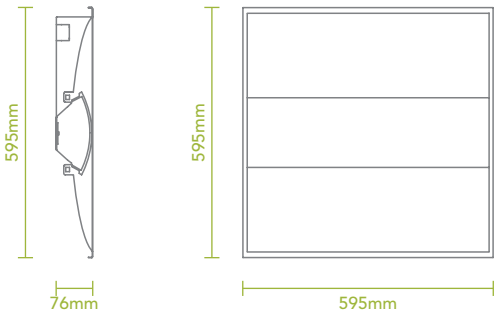

MODEL	LED	LED LUMENS	SYS. POWER	CRI	CCT	DIMENSIONS
ARC-S3	OSRAM	2600lm	15.4W	≥80	3000K	595 x 595 x 76mm
			14.8W		4000K	

PHOTOMETRIC DATA	SECTION SIZE
	

MAXLIGHT

MAXLIGHT RESERVES RIGHTS TO INTRODUCE ANY CONSTRUCTION OR TECHNICAL CHANGES IN THE PRODUCTS. WATTAGE OF PRODUCTS MAY VARY DUE TO CONSTANT LED EFFICACY IMPROVEMENTS. VALUES MARKED WITH AN * ARE RATED VALUES. LUMINAIRE LUMINOUS FLUX AND SYSTEM WATTAGE ARE SUBJECT TO AN INITIAL TOLERANCE OF +/- 10%. ALL VALUES STATED AT AN AMBIENT TEMPERATURE OF 25°C.