








PROJECT	TYPE NO.	DATE

ALUMINIUM EXTRUSION

BLOC75

-  IP20
- 
- 
-  BLACK
-  WHITE
-  NATURAL ANODISED
-  SP AS REQUIRED

HOUSING

Extruded Aluminium
Electrostatically applied Polyester Powder Coat

DIFFUSER

Ice-High Transmission

MOUNTING TYPE

Surface or Suspended

LED MODULE

Osram
Optional: Philips, Tridonic

DRIVER

Integral Osram, Philips, Tridonic

DIMMING OPTIONS

DALI, Touch Dim, DSI or 1V-10V

INPUT VOLTAGE

220V-240V AC/50Hz-60Hz

OPERATING TEMPERATURE RANGE

-20°C to +40°C

MAINTENANCE OF LUMEN

L70 50,000 hours at 25°C

DRIVER LIFETIME

50,000 hours


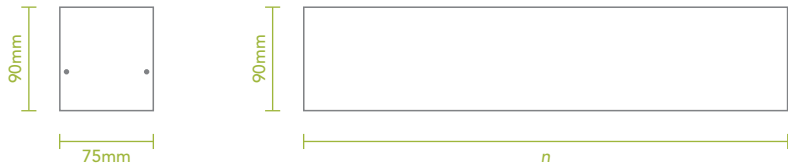
SYSTEM WARRANTY

5 years



MODEL	LED	LED LUMENS	SYS. POWER	CRI	CCT	DIMENSIONS
B75	OSRAM	1800lm	11.2W	≥80	3000K	n x 75 x 90mm
			10.7W		4000K	
B75	OSRAM	2600lm	15.4W	≥80	3000K	n x 75 x 90mm
			14.8W		4000K	
B75	OSRAM	3500lm	21.7W	≥80	3000K	n x 75 x 90mm
			20.8W		4000K	
B75	OSRAM	4400lm	28.7W	≥80	3000K	n x 75 x 90mm
			27.7W		4000K	

* TECHNICAL INFORMATION BASED ON S4

PHOTOMETRIC DATA	SECTION SIZE
	 <p>n:</p> <ul style="list-style-type: none"> S2 570mm S3 850mm S4 1130mm S5 1420mm C Custom Length