

| PROJECT | TYPE NO. | DATE |
|---------|----------|------|
| | | |

PANEL LIGHT

HPP-S3

-  IP40
-  F
-  CE
- 
-  SILVER
-  WHITE

DIFFUSER
Anti-Glare

MOUNTING TYPE
T-Bar

LED MODULE
SMD LED

DRIVER
Tridonic

DIMMING OPTIONS
DALI, Triac Dim, or 1V-10V

INPUT VOLTAGE
220V-240V AC/50Hz-60Hz

OPERATING TEMPERATURE RANGE
-20°C to +40°C

MAINTENANCE OF LUMEN
L70 50,000 hours at 25°C


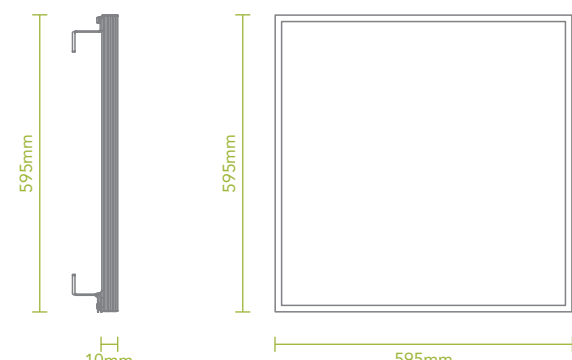
DRIVER LIFETIME
50,000 hours

SYSTEM WARRANTY
5 years

AVAILABLE WITH
·Surface-Mounting Kits
·Plaster-Recess Kits



| MODEL | SYS. POWER | CRI | CCT | LED LUMEN | DIMENSIONS | NET WEIGHT |
|------------------|------------|-----|-------|-----------|------------------|------------|
| HPP-S3-33 | 33W | ≥80 | 3000K | 3200lm | 595 x 595 x 10mm | 4.2kg |
| HPP-S3-33 | 33W | ≥80 | 4000K | 3300lm | 595 x 595 x 10mm | 4.2kg |

| PHOTOMETRIC DATA | SECTION SIZE |
|---|--|
|  |  |