



MINI LINEAR PROFILE

# SLR-13



**PROJECT**

---

**TYPE NO.**



---

**DATE**

---



DESCRIPTION
<b>HOUSING</b>
Aluminium, Polycarbonate End-Caps
<b>MOUNTING TYPE</b>
Plaster Recessed
<b>LED MODULE</b>
Astroled Tape
<b>DRIVER</b>
Osram, Tridonic, Meanwell
<b>INPUT VOLTAGE</b>
220V-240V AC/50Hz-60Hz
<b>OPERATING TEMPERATURE RANGE</b>
-20°C to +40°C
<b>MAINTENANCE OF LUMEN</b>
L70 50,000 hours at 25°
<b>DRIVER LIFETIME</b>
50,000 hours
<b>SYSTEM WARRANTY</b>
3 Years

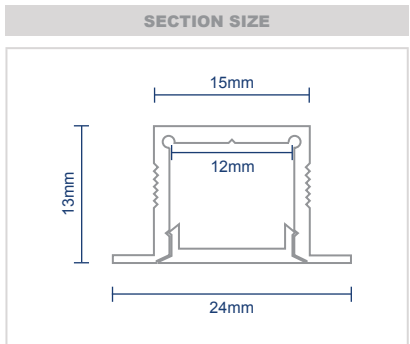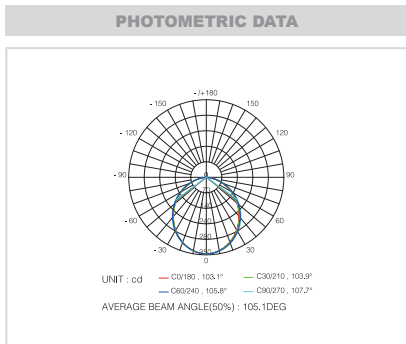

PARAMETERS										
MODEL	DIMENSIONS	LIGHT SOURCE	LED QTY	MIN CUT	FPC WIDTH	LUMENS	LED POWER	CRI	CCT	VOLTAGE
SLR-13	2500 x 24 x 13mm	D560	60/m	6/100mm	10mm	880lm/m	14.4W/m	≥80	3000K 4000K	24V

\*Technical information based on AL-TV-14 LED tape, for other types, please refer to Astro-LED Tape.