

PROJECT	TYPE NO.	DATE

## ADJUSTABLE SQUARE DOWNLIGHT

# VELA-792



IP20



CE



170 x 90mm



20° 20°



BLACK



WHITE

### TRIM & HOUSING

Steel  
Electrostatically applied Powder Coat

### MOUNTING RING

Aluminium Die-Cast  
Electrostatically applied Powder Coat

### ADJUSTABLE RING

Aluminium Die-Cast  
Electrostatically applied Powder Coat  
Adjustable Angle (Tilt  $\leq 20^\circ$ )

### HEAT SINK

Aluminium Anodised Coating

### REFLECTOR

Aluminium Anodised Specular Silver

### LED MODULE

Cree

### DRIVER

Remote Osram, Tridonic

### DIMMING

DALI

### INPUT VOLTAGE

220V-240V AC/50Hz-60Hz

### OPERATING TEMPERATURE

RANGE -20°C to +40°C

### MAINTENANCE OF LUMEN


L70 50,000 hours at 25°C

### DRIVER LIFETIME

50,000 hours

### SYSTEM WARRANTY

5 years

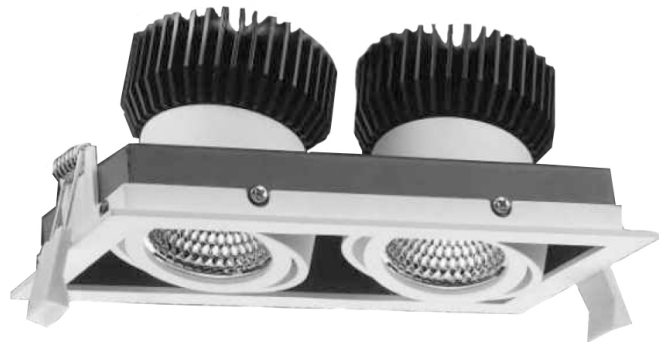

MODEL	LED	LUM. LUMENS*	SYS. POWER*	CRI	CCT	BEAM ANGLE	DIMENSIONS
VLA-792	CREE	2 x 700lm	2 x 8W	≥80	3000K	18° 24° 36°	180 x 100 x 73mm
		2 x 750lm	2 x 8W		4000K		
VLA-792	CREE	2 x 1250lm	2 x 14W	≥80	3000K	18° 24° 36°	180 x 100 x 73mm
		2 x 1300lm	2 x 14W		4000K		